

AGM

Holding the World's Insulation in Place

PERFORATED TACTOO[®] INSULATION HANGERS

Perforated TACTOO[®] Insul-Hangers are used to attach insulation with the use of TACTOO[®] General Purpose Adhesive. The GPA-72 is specially formulated to bond to metal, masonry and other sound substrates. Surfaces must be clean and dry before adhesive is applied. Some protective coatings are not compatible with adhesives and it is recommended that the user make test bonds before proceeding with the application. Please see AGM Data Sheet GPA for more complete information regarding use, application, storage, etc. After the hanger is installed, insulation is impaled over the spindle and secured with a self-locking washer.

Specifications

D	P	L
12 ga (.106)	2" Square	1"
12 ga (.106)	2" Square	1-5/8"
12 ga (.106)	2" Square	2"
12 ga (.106)	2" Square	2-1/2"
12 ga (.106)	2" Square	3-1/2"
12 ga (.106)	2" Square	4-1/2"
12 ga (.106)	2" Square	5-1/2"
12 ga (.106)	2" Square	6-1/2"
12 ga (.106)	2" Square	8"
12 ga (.106)	2" Square	8-1/2"
12 ga (.106)	2" Square	9-1/2"
12 ga (.106)	2" Square	10-1/2"


Standard Lengths listed above. Other lengths and diameters available as Special Order.

Material

- Galvanized Steel (Standard)
- Available in Stainless Steel or Aluminum as special order

Packaging

- 1,000 pcs/ctn up to 2-1/2"
- 500 pcs/ctn up to 8-1/2"
- 250 pcs/ctn up to 12"
- 100 pc packaging also available
- Hangers are available packed with, or without washers.

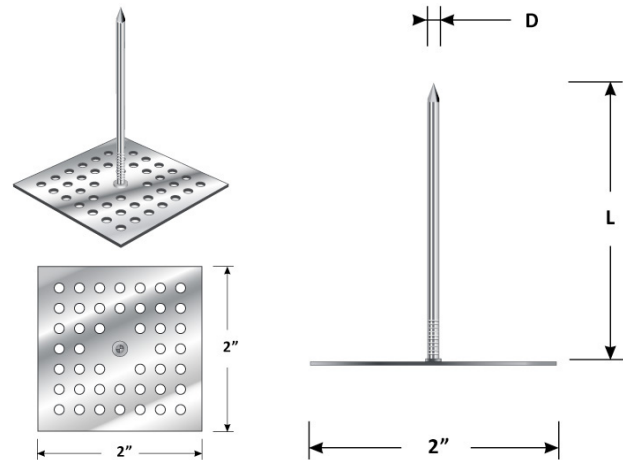

AGM Industries, Inc., 16 Jonathan Drive, Brockton, MA 02301

Phone: (508) 587-3900 | Fax: (508) 587-3283 | sales.agm@comcast.net | www.agmind.com